

RD29186-2

IN THE CLAIMS

1. (Original) A method for embossing a surface of a polymer composition, having a first glass transition temperature (T_{g1}), the method comprising:

embossing the surface at temperature T_{emb} ; and

altering the T_{g1} of the surface to provide a second glass transition temperature (T_{g2}), wherein the altering is during embossing, after embossing, or both during and after embossing.

2. (Currently amended) The method of claim 1, wherein the polymer ~~composition~~ composition comprises thermoplastics, thermosets, blends of thermoplastics, blends of thermosets, or blends of thermoplastics with thermosets.

3. (Original) The method of claim 2, wherein the polymer is a thermoplastic selected from the group consisting of polyvinyl chloride, polyolefins, polyethylene, chlorinated polyethylene, polypropylene, polyesters, polyethylene terephthalate, polybutylene terephthalate, polycyclohexylmethyleneterephthalate, polyamides, polysulfones, hydrogenated polysulfones, polyimides, polyether imides, polyether sulfones, polyphenylene sulfides, polyether ketones, polyether ether ketones, ABS resins, polystyrenes, hydrogenated polystyrenes, syndiotactic and atactic polystyrenes, polycyclohexyl ethylene, styrene-co-acrylonitrile, styrene-co-maleic anhydride, polybutadiene, polyacrylates, polymethylmethacrylate, methyl methacrylate-polyimide copolymers, polyacrylonitrile, polyacetals, polycarbonates, polyphenylene ethers, ethylene-vinyl acetate copolymers, polyvinyl acetate, liquid crystal polymers, ethylene-tetrafluoroethylene copolymer, aromatic polyesters, polyvinyl fluoride, polyvinylidene fluoride, polyvinylidene chloride, polytetrafluoroethylene, and combinations comprising at least one of the foregoing thermoplastics.

4. (Original) The method of claim 2, wherein the polymer is a thermoplastic blend selected from the group consisting of acrylonitrile-butadiene-styrene/nylon, polycarbonate/acrylonitrile-butadiene-styrene, acrylonitrile butadiene styrene/polyvinyl chloride, polyphenylene ether/polystyrene, polyphenylene ether/nylon, polysulfone/acrylonitrile-butadiene-

RD29186-2

styrene, polycarbonate/thermoplastic urethane, polycarbonate/polyethylene terephthalate, polycarbonate/polybutylene terephthalate, thermoplastic elastomer alloys, nylon/elastomers, polyester/elastomers, polyethylene terephthalate/polybutylene terephthalate, acetal/elastomer, styrene-maleic anhydride/acrylonitrile-butadiene-styrene, polyether etherketone/polyethersulfone, polyimide/polysiloxane, polyetherimide/polysiloxane, polyethylene/nylon, polyethylene/polyacetal, and combinations comprising at least one of the foregoing blends of thermoplastic polymers.

5. (Original) The method of claim 2, wherein the polymer is a thermoset selected from the group consisting of epoxy, phenolics, alkyds, polyesters, polyurethanes, silicone polymers, mineral filled silicones, bis-maleimides, cyanate esters, vinyl, benzocyclobutene polymers, and combinations comprising at least one of the foregoing thermosetting polymers.

6. (Original) The method of claim 1, wherein the polymer is selected from the group consisting of polyimides, polyetherimides, copolymers of polyimides, copolymers of polyetherimides, and blends comprising at least one of the foregoing polymers.

7. (Original) The method of claim 6, wherein the polymer composition comprises reactive moieties selected from the group consisting of vinyl substituted aromatic monoamines, polyfunctional alkenyl aromatic monomers, acryloyl monomers, sulfides, toluidines, ethynyl groups, ethyl groups, ethenyl groups, epoxies, fluoroolefins, alkoxysilanes, and combinations comprising at least one of the foregoing reactive moieties.

8. (Original) The method of claim 6, wherein the polymer comprises about 0.1 to about 30 wt.% reactive moieties, based on the total weight of the polymer.


9. (Original) The method of claim 6, wherein the polymer composition further comprises a perfluorocarbon.

10. (Original) The method of claim 6, wherein T_{g2} is greater than T_{emb} .


11. (Original) The method of claim 6, wherein T_{g2} is greater than T_{g1} .

RD29186-2

12. (Currently Amended) The method of claim 6, wherein the polymer comprises a reactive plasticizer having the structural formula A-R-A wherein A is a reactive functionality selected from the group consisting of vinyl substituted aromatic monoamines, polyfunctional alkenyl aromatic monomers, acryloyl monomers, sulfides, toluidines, ethynyl groups, ethyl groups, ethenyl groups, epoxies, fluoroolefins, alkoxysilanes, and combinations comprising at least one of the reactive functionalities and R is a monomeric or oligomeric polyimide repeat unit shown in the formula (XVIII)




wherein ~~herein~~ Y is -O- or a group of the formula -O-Z-O- wherein the divalent bonds of the -O- or the -O-Z-O- group are in the 3,3', 3,4', 4,3', or the 4,4' positions, and wherein Z comprises divalent radicals of formula (III)

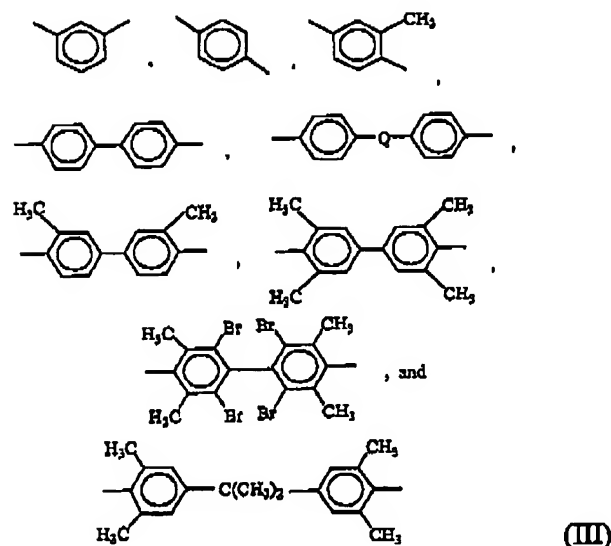



[[w herein]] wherein n is an integer from 0 to about 5 and Ar is an aromatic group comprising reactive diamines.

RD29186-2

13. (Currently amended) The method of claim 6, wherein the polymer comprises a reactive plasticizer selected from the group having the structural formula XIXa, XIXb, XIXc,

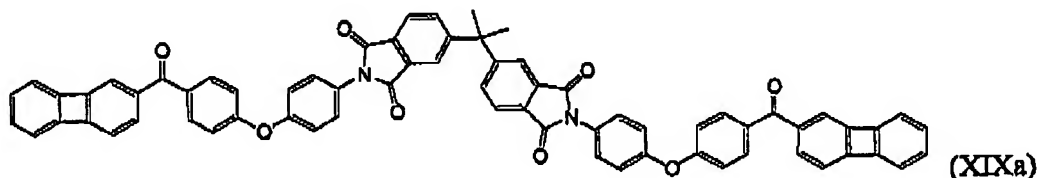

[[o]]

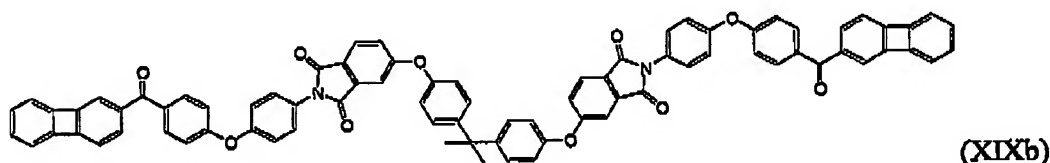

[[r]]] or combinations comprising at least one of XIXa, XIXb, XIXc, wherein R is an aromatic moiety having about 36 to about 60 carbon atoms.

14. (Original) The method of claim 13, comprising about 5 to about 25 wt% reactive plasticizer, based on the total weight of the composition.

15. (Original) The method of claim 6, wherein the polyimide, polyetherimide, copolymer of polyimide, or copolymer of polyetherimide has one or more of fluorine atoms, silicon atoms, or siloxane segments.

16. (Original) The method of claim 6, wherein the polymer composition further comprises polyamic acid.

17. (Original) A method for the manufacture of an embossed polymer surface, which comprises:

embossing a surface comprising a polymer and a plasticizer having reactive moieties; and

RD29186-2


reacting the reactive moieties to increase the glass transition temperature of the embossed polymer surface.

18. (Original) The method of claim 17, wherein the polymer surface comprises a thermoplastic selected from the group consisting of polyimides, polyetherimides, copolymers of polyimides, copolymers of polyetherimides, blends of polyimides with perfluorocarbons, blends of polyetherimides with perfluorocarbons and combinations comprising at least one of the foregoing thermoplastics.

19. (Original) The method of claim 17, wherein the polymer comprises a reactive plasticizer in an amount effective raise the glass transition temperature of the polymer after crosslinking.


20. (Currently amended) The method of claim 17, wherein the ~~polymer~~ polymer comprises reactive moieties selected from the group consisting of vinyl substituted aromatic monoamines, polyfunctional alkenyl aromatic monomers, acryloyl monomers, sulfides, toluidines, ethynyl groups, ethynyl groups, ethenyl groups, epoxies, fluoroolefins, alkoxysilanes, and combinations comprising at least one of the foregoing reactive moieties.

21. (Currently amended) The method of claim 17, wherein the polymer comprises a reactive plasticizer having the structural formula A-R-A where A is a reactive functionality selected from the group consisting of vinyl substituted aromatic monoamines, polyfunctional alkenyl aromatic monomers, acryloyl monomers, sulfides, toluidines, ethynyl groups, ethynyl groups, ethenyl groups, epoxies, fluoroolefins, alkoxysilanes, and combinations comprising at least one of the reactive functionalities and R is a monomeric or oligomeric polyimide repeat unit shown in the formula (XVIII)

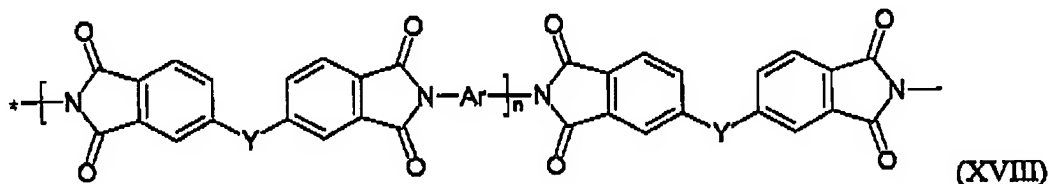


RD29186-2

[[Y]] wherein Y is -O- or a group of the formula -O-Z-O- wherein the divalent bonds of the -O- or the -O-Z-O- group are in the 3,3', 3,4', 4,3', or the 4,4' positions, and wherein Z comprises divalent radicals of formula (III)

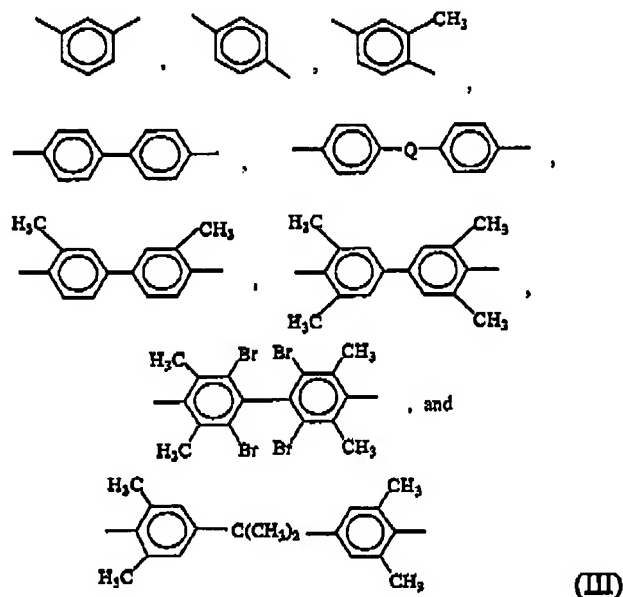


wherein n is an integer from 0 to about 5 and Ar is an aromatic group comprising reactive diamines.

22. (Currently amended) The method of claim 17, wherein the polymer comprises a reactive plasticizer selected from the group having the structural formula XIXa, XIXb, XIXc:

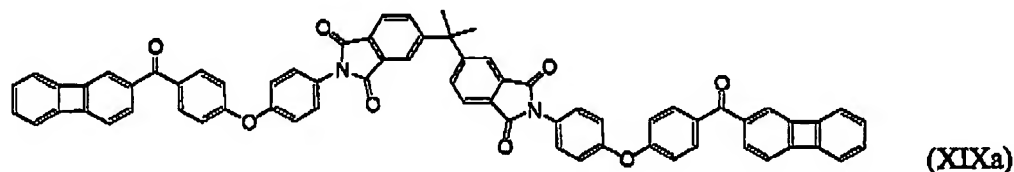


(XIXa)



(XIXb)

RD29186-2



or combinations comprising at least one of XIXa, XIXb, XIXc, wherein R is a moiety having aromatic groups and from 36 to 60 carbon atoms.

23. (Original) A method for the manufacture of an embossed polymer surface, which comprises:

embossing a surface comprising the reaction product of m-phenylenediamine and a dianhydride; and

treating the embossed polymer to increase the glass transition temperature of the embossed polymer.

24. (Original) The method of Claim 23, wherein the dianhydride is selected from the group consisting of bisphenol A dianhydride, 4,4'-oxydiphthalic anhydride, hexafluoroisopropylidene diphthalic anhydride, and combinations comprising at least one of the foregoing dianhydrides.

25. (Original) The method of Claim 23, wherein an amine terminated siloxane is further added to the reaction product of m-phenylenediamine and the dianhydride.

26. (Original) The method of Claim 23, wherein polyamic acid is further added to the reaction product of m-phenylene diamine and the dianhydride.

27. (Original) The method of claim 23, wherein the polymer surface comprises reactive moieties selected from the group consisting of vinyl substituted aromatic monoamines, polyfunctional alkenyl aromatic monomers, acryloyl monomers, sulfides, toluidines, ethynyl groups, ethynyl groups, ethenyl groups, epoxies, fluoroolefins, alkoxysilanes, and combinations comprising at least one of the foregoing reactive moieties.

RD29186-2

28. (Original) The method of claim 23, wherein the polymer comprises a reactive plasticizer.
29. (Withdrawn) An article formed by the method of claim 1.
30. (Withdrawn) An article formed by the method of claim 17.
31. (Withdrawn) An article formed by the method of claim 23.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.